


RF Saw Filters



TSF 5050 (5.0 x 5.0 x 1.7 mm)




Part Number	Center Frequency	Pass Band	Insertion Loss	Part Number	Center Frequency	Pass Band	Insertion Loss
	(MHz)	(MHz)	(dB Max)		(MHz)	(MHz)	(dB Max)
TSF0245A	139	8	6.5	TSF0797A	340	6	3.5
TSF155FD	155	8	6.5	TSF0188A	343.5	4	4
TSF0168A	163	8	6.5	TSF1418A	345	0.8	3.3
TSF0437A	169	6	2.8	TSF1528A	352	1	3.6
TSF1715A	169.4	0.2	3	TSF0113A	360	20	3.5
TSF0181A	171	8	6.5	TSF1688A	367.5	2	3
TSF0574A	180.175	6	2.8	TSF0964A	387.5	5	3
TSF0461A	184	6	2.8	TSF1346A	388	4	3
TSF0575A	188.175	6	2.8	TSF1678A	388.5	3	3
TSF0369A	220	4	4.2	TSF0376A	390	1.1	4
TSF0576A	221.6	10	3	TSF0115A	390	20	3.3
TSF0422A	230.4	1	3.8	TSF1486A	391	8	4
TSF1472A	246	0.2	3.4	TSF0559A	394	4	3
TSF0998A	250	1	3.8	TSF0875A	402	16	3
TSF1345A	262	4	3	TSF0309A	403.55	1.15	4
TSF1485A	265	8	4	TSF0417A	408.5	16	2.8
TSF0560A	268	4	3	TSF1614A	413	2	3
TSF0510A	280	8	4.5	TSF0526A	415.4	5	3.6
TSF284FD	284	8	4.5	TSF0311A	420	18	2.8
TSF0486A	285	8	4.5	TSF1613A	423.75	4.5	3.5
TSF1467A	291.4	7	4.5	TSF0418A	424	18	2.8
TSF1637A	309	10.06	3	TSF0192A	426.1	0.138	3.5
TSF0209A	315	0.8	4	TSF0527A	427.8	5	3.6
TSF0308A	315.15	0.8	4	TSF0286A	433	8	4.5

[Click To Quote](#)

RF Saw Filters



TSF 5050 (5.0 x 5.0 x 1.7 mm)




Part Number	Center Frequency	Pass Band	Insertion Loss	Part Number	Center Frequency	Pass Band	Insertion Loss
	(MHz)	(MHz)	(dB Max)		(MHz)	(MHz)	(dB Max)
TSF0293A	433.42	0.5	4	TSF0978A	504	8	4.5
TSF0278A	433.92	4	3.5	TSF0960A	554	12	4.5
TSF0307A	433.92	0.7	4	TSF0961A	584	12	4.5
TSF0264A	433.92	0.6	4	TSF1906A	604.5	5	3
TSF0412A	433.92	0.95	4	TSF0800A	609.9	5	3.5
TSF0693A	435	10	3.3	TSF0794A	611	7	4.5
TSF0411A	440	19	2.8	TSF1649A	616.25	2.5	3.5
TSF0419A	441	19	2.8	TSF1650A	618.25	2.5	3.5
TSF1084A	441	15	2.8	TSF0817A	638	11	3.5
TSF0420A	460	20	2.8	TSF0818A	656	11	3.5
TSF0731A	460	20	3	TSF0342A	713	6	4.5
TSF0114A	460	20	3.2	TSF0343A	743	6	4.5
TSF465FD	465	4	4	TSF0822A	757.5	1	5
TSF0313A	465	20	2.9	TSF0694A	862.5	0.5	4.5
TSF0266A	465.1375	5.175	4	TSF0280A	868.3	1.5	4.2
TSF470FD	470	4.0	4	TSF0336A	868.69	1.38	4.7
TSF0568A	475	12	3.3	TSF0274A	868.95	1.5	4.7
TSF0107A	479.5	26/18	22.5	TSF0275A	869.6	1.5	4.7
TSF0421A	480	20	2.8	TSF0317A	869.85	1.85	4.7
TSF0555A	480	8	3.1	TSF1365A	886	10	4.5
TSF0524A	499.25	1	5	TSF1483A	1000	0.8	5
TSF0979A	500	6	4.7				

[Click To Quote](#)


RF Saw Filters





TSF 5050
(5.0 x 5.0 x 1.7 mm)



TSF 5050 Package

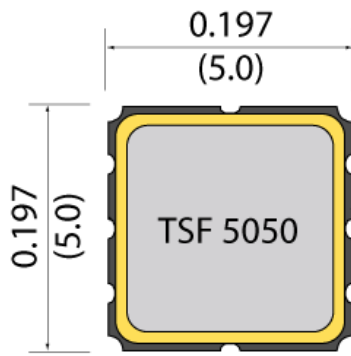

Measurements: Inches (mm)
Att'l Tolerance: ± 0.008 (± 0.2)

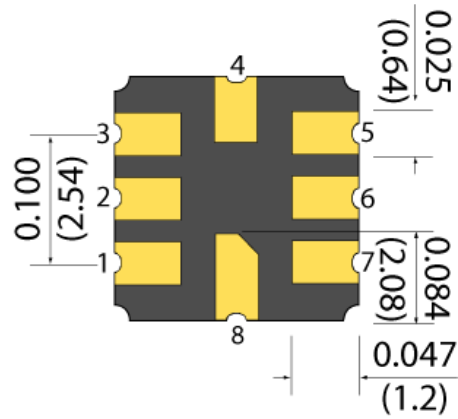

Pad	Function
2	Input
6	Output
1,3,4,5,7,8	Ground

Items listed are common filters. Custom filters are available.
Please contact Tellurian for more information.

[Click To Quote](#)